


ASK 21 / ASK 21 Mi
Maintenance Instruction, Canopy
Emergency Jettison Locking, Issue I

Alexander Schleicher
GmbH & Co.
Segelflugzeugbau
D - 36163 Poppenhausen

- Subject:** Locking of the canopy emergency jettison lever (front cockpit)
- Applicability:** ASK 21; Type-Certificate EASA.A.221; models **ASK 21** and **ASK 21 Mi**; all serial numbers after every operation of the front canopy emergency jettison
- Urgency:** after every operation of the front canopy emergency jettison
- Reason:** Increasing number of questions how to lock the front canopy emergency jettison lever
- Action:** After the front canopy is fitted and the canopy emergency jettison lever is fully closed (right-most position), it has to be secured against inadvertent operation as follows:

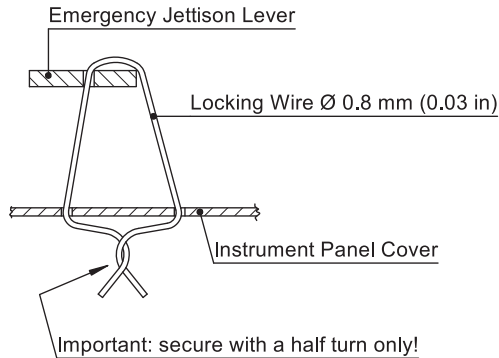

Never twist the locking wire more than a half turn, as this will prevent the operation of the emergency jettison! In case of any doubt test the operation of the emergency jettison with the locking wire installed and install a new locking wire later in the same way.

- Material and Drawings:** See Action
- Notes:** none

Poppenhausen, 20.12.2018

Alexander Schleicher
GmbH & Co.

i.A. 
(P. Anklam)